

> PROTECTIVE WATERPROOF COATING PRODUCTS



PYE Products..... easy to use



PYEAQUA-PLUG

Non Shrink Hydraulic Cement

DESCRIPTION

PYEAQUA-PLUG is a fast setting, easy to use non-shrink and chloride free hydraulic cementitious product. It is used to patch running water instantly under hydrostatic water pressure. It is able to stop running water instantly and as the name suggest, it will not shrink or expand as it sets.


SUITABLE FOR

- Stopping leakage through holes and cracks in concrete pipes, tanks and tunnel.
- Patching joint filling.
- Anchoring bolts and conduits.
- Waterproofing of concrete, brick tunnel, sewage system and pipes.

DIRECTIONS FOR USE

Surface preparation

Surfaces must be clean and free of grease, oil dust, paint or any loose materials in order to achieve a good bonding. Before applying **PYEAQUA-PLUG**, cut open all cracks to be treated to a depth of approximately 25mm. Undercut if possible.

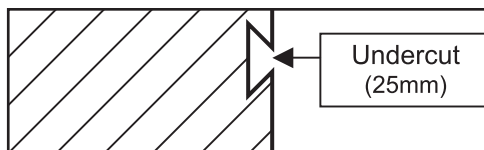

Mixing

A clean pail should be used and 2 volumes of **PYECM** added to 1 volume of water. Stir to a smooth paste. Add sufficient water to produce a full bodied paint. Stir mixture constantly and use within an hour.

Application

Wet the area to be treated with clean water before applying **PYEAQUA-PLUG**. Use a trowel or hand knead to patch this hydraulic cement to the surface to be treated. Place **PYEAQUA-PLUG** with minimum rubbing. Make sure the mixed

Product code: PRAQ

PYEAQUA-PLUG is pushed firmly into the hole and cracks and held in place until it reaches initial set.

PRODUCT PERFORMANCE

- Stop running water instantly
- Easy to use (only add water)
- Chloride free & Non toxic
- Excellent adhesion
- Will not rust out or cause corrosion to steel bars.

TECHNICAL & PHYSICAL DATA

Colour	Grey
Form	Powder
Adhesion	Excellent adhesion
Curing	Standard procedures
Yield	Approx. 0.6 litres of water per 1kg of PYEAQUA-PLUG
Safety	Non-toxic/ Non-flammable when set.
Health	Keep away from children. Contact with skin, wash out with a lot of water. Contact with eyes wash out with a lot of water and seek medical attention. Use gloves eye protection when handling.
Setting	Within 3 - 5 minutes at 25°C
Shelf life	6 month when unopened.
Storage	Store in cool & dry place and protect from water.
Cleaning	Clean tools with water. If harden, remove mechanically.

PACKING

1.0kg, 4.5kg & 25kg

Further information and advice are freely available from:

PYE PRODUCTS (M) SDN. BHD. (Co. No. 206933-D)

Lot 4993, 5½ Mile Jalan Meru, 41050 Klang, Selangor Darul Ehsan, Malaysia.

Tel : 603-3392 8104, 3392 8112 Fax : 603-3392 8097

E-mail : enquiry@pyeproducts.com Website : www.pyeproducts.com



All information contained within this brochure is only intended to give a fair description of the products and their capabilities under specific test conditions. However, it does not constitute an offer of warranty by the manufacturer nor a guarantee of its accuracy or completeness in describing the performance or suitability of the various products.