


> PLASTER PRODUCTS



PYE Products..... easy to use

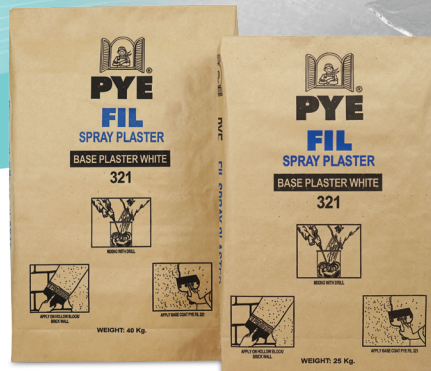

## PYEFIL BPW 321

Base Plaster White

### DESCRIPTION

**PYEFIL BPW 321** spray plasters are cement based filling and leveling plasters formulated with special chemical additives that provide good workability, improved adhesion and durability. **PYEFIL** assists in correcting surface imperfections. Ceramic tiles and natural stones can be fixed on a **PYEFIL** finished surface. **PYEFIL** is not recommended to be used on painted or other non-cementitious based substrates.

### SUITABLE FOR

Concrete, rendered wall, hollow block, aerated light weight block, calcium silicate brick, precast walls and concrete ceilings.

### DIRECTIONS FOR USE

#### Surface preparation

Substrate must be clean, free of dust, oil, paint, grease and all traces of mould. Prewetting is recommended for very dry surfaces, but over wetting resulting in accumulation of water on the surface should be avoided.

#### Mixing

Add about 8.5 - 9 litres of water to a 25kg bag of **PYEFIL** and mix with a powered drill whisk or a suitable mechanical stirrer for 10 minutes to obtain a homogeneous smooth paste. Re-mix again for 1 minute if the material is left undisturbed for not more than 30 minutes.

Product Code: PLBW

### Application

Apply by using a spray plaster machine or directly with a steel trowel or spatula. Level out to a thickness of 2 - 4mm to obtain the correct level or alignment. When applying several layers, the base layer must be dry before spreading the subsequent layer. For an extra smooth finished surface, apply one coat of **PYEFIL WF221** finish skim plaster to a thickness of 1 - 2mm.

### TECHNICAL & PHYSICAL DATA

Colour	BPW 321-White
Recommended thickness	2 - 4mm
Form	Powder
Pull out test	As per test report enclosed.
Coverage	1.25kg/mm/m <sup>2</sup>
Pot life	2 - 3 hours
Yield	Approx. 8.5 - 9 litres of water per 25kg bag.
Cleaning	Clean tools with clean water.
Fire hazard	Does not spread/ support fire.

### STORAGE

**PYEFIL** has a shelf life of 6 months, if kept in a dry and cool condition.

### PACKING

25kg or 40kg bags

Further information and advice are freely available from:

## PYE PRODUCTS (M) SDN. BHD. (Co. No. 206933-D)

Lot 4993, 5½ Mile Jalan Meru, 41050 Klang, Selangor Darul Ehsan, Malaysia.

Tel : 603-3392 8104, 3392 8112 Fax : 603-3392 8097

E-mail : enquiry@pyeproducts.com Website : www.pyeproducts.com



All information contained within this brochure is only intended to give a fair description of the products and their capabilities under specific test conditions. However, it does not constitute an offer of warranty by the manufacturer nor a guarantee of its accuracy or completeness in describing the performance or suitability of the various products.