




PYE

PYE Products..... easy to use

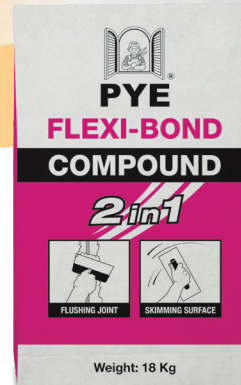

PYE FLEXI-BOND COMPOUND (2 in 1)

Product Code : PLFB

DESCRIPTION

PYE FLEXI-BOND COMPOUND is a plaster-based compound used for flushing joints of plaster boards. It can also be used as a putty to touch-up the fibrous plaster board and can produce a smooth fine finish using a steel trowel.

- Allow to soak for 1 to 3 minutes before mixing.
- Mix to a smooth creamy workable consistency.
- Do not over mix otherwise it will accelerate the setting time of the mixture.

DIRECTIONS FOR USE

Surface preparation

Inspect all nails and drive protruding nails below surface leaving 1/32 inch depression in surface. Make sure surfaces are clean, dry and free from foreign materials.

TECHNICAL & PHYSICAL DATA

Colour	White
Form	Powder
Drying time	Approximately 20 minutes depending on the thickness.
Cleaning	Clean tools with water.

- Apply the mixture, filling up the joints using a steel trowel.
- Apply evenly over the joints and remove excess compound.
- Apply to fill up uneven surfaces.
- All tools to be washed with clean water and wipe dry before storing.

STORAGE

- Store at place temperature in a cool and dry location.
- Keep away from direct exposure to sunlight.

Application

Mixing

- Fill container with clean water.
- Sprinkle the stopping compound into the water (Approx. 2 or 2.5 parts of compound to 1 part of water depending on the consistency required).

PACKING

18kg

Further information and advice are freely available from:

PYE PRODUCTS (M) SDN. BHD. (Co. No. 206933-D)

Lot 4993, 5½ Mile Jalan Meru, 41050 Klang, Selangor Darul Ehsan, Malaysia.

Tel : 603-3392 8104, 3392 8112 Fax : 603-3392 8097

E-mail : enquiry@pyeproducts.com Website : www.pyeproducts.com



All information contained within this brochure is only intended to give a fair description of the products and their capabilities under specific test conditions. However, it does not constitute an offer of warranty by the manufacturer nor a guarantee of its accuracy or completeness in describing the performance or suitability of the various products.