




PYE Products..... easy to use

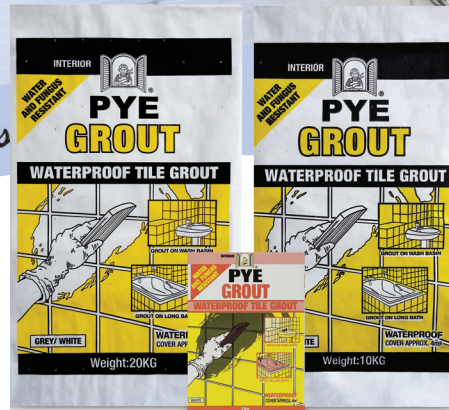

PYEGROUT

Waterproof Grouting Compound for Tiles.

DESCRIPTION

PYEGROUT is a protective waterproof dense cement mixture used to fill the joints of mosaic, ceramic and other similar tiles. When mixed with water, it produces a smooth non-shrinking hard joint. It provides an attractive appearance and prevents the ingress of water behind the tiling surface. It is resistant to fungus and mould growth.

SUITABLE FOR

Use in the tiled areas of kitchens, shower recesses, toilets, walls and floors. It is suitable for both interior and exterior use.

DIRECTIONS FOR USE

Surface preparation

Allow the tile adhesive to cure for 24 hours before grouting. On non-porous backings, the time internal should be extended to a minimum of 3 days. For exterior work, it is important that water is not allowed to penetrate the open joints before grouting commences.

Mixing

Add sufficient water and mix to a thick uniform, creamy consistency. Allow to stand for 5 - 10 minutes and re-stir before use.

Product Code : WAGR

Application

- Grout tiles after the adhesives has had sufficient time to set.
- Dampen the tile joint with a sponge and apply the prepared grout, spreading at the rate of 3m at a time.
- Work well into joints with a sponge, grouting tools or squeegee.
- Remove surplus grout with a piece of damp cloth or sponge.
- Allow grout to set firm (approximately one day).

TECHNICAL & PHYSICAL DATA

Colour	White, Grey
Adhesion	Excellent adhesion to concrete, masonry and asbestos cement.
Drying time	1 - 2 hours under normal conditions.
Coverage	Approx. 2sq.m. of tiles per kg.
Cleaning	Clean all equipment with water before setting occurs.

PACKING

1kg, 5kg, 10kg & 20kg

Further information and advice are freely available from:

PYE PRODUCTS (M) SDN. BHD. (Co. No. 206933-D)

Lot 4993, 5½ Mile Jalan Meru, 41050 Klang, Selangor Darul Ehsan, Malaysia.

Tel : 603-3392 8104, 3392 8112 Fax : 603-3392 8097

E-mail : enquiry@pyeproducts.com Website : www.pyeproducts.com



All information contained within this brochure is only intended to give a fair description of the products and their capabilities under specific test conditions. However, it does not constitute an offer of warranty by the manufacturer nor a guarantee of its accuracy or completeness in describing the performance or suitability of the various products.