




PYE

PYE Products..... *easy to use*

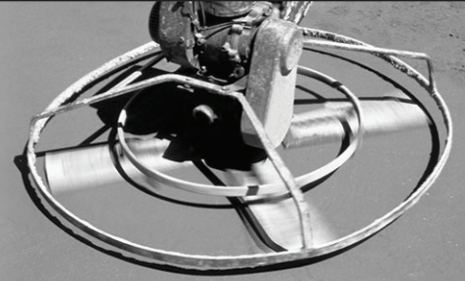

PYEFLOOR HARDENER NS

Natural Silica Dry Shake Floor Hardener

Product Code : PLFH

DESCRIPTION

PYEFLOOR HARDENER NS is designed to provide a monolithic, abrasion and impact resistant floor finish. It is composed of selected silica-quartz aggregates, cement and plasticizer. **PYEFLOOR HARDENER NS** can be applied onto any concrete or cementitious based substrate.

application of **PYEFLOOR HARDENER NS**. Do not overwork the surface at this stage. Repeat the process again with the balance 40% of the material and compact with the mechanical power floating machine, at a high speed, until a dense finish is achieved.

DIRECTIONS FOR USE

Surface preparation

Base concrete substrate must be fully compacted with a grade of at least 25N/mm³ and a site slum of 70 to 100mm. The base concrete shall be stiffened, at an initial setting point, where light foot traffic is allowed and does not leave a maximum of 5mm deep imprint. However, the timing shall not be too late until the moisture within the concrete is insufficient to hydrate the **PYEFLOOR HARDENER NS**. Bleeding on the surface is to be avoided.

Curing

Spray apply proper curing compound or use polyethylene sheet.

Application

Evenly broadcast about 60% of the material onto the base substrate. Wait until the colour of the **PYEFLOOR HARDENER NS** darkens from the absorption of the moisture from the base substrate. Lightly compact the material using a mechanical power floating machine, at a low speed, to prepare the surface for the second

TECHNICAL & PHYSICAL DATA

Colour	Natural cement or other decorative colours.
Form	Powder
Binder	Cement
Filler	Silica-Quartz Aggregate
Coverage	Approx. 5kg/m ²
Drying time	Foot traffic - 24 hours Full loading - 28 days
Cleaning	Clean tools with water
Fire Hazard	Non-hazardous

STORAGE

PYEFLOOR HARDENER NS has a shelf life of 6 months, if kept in a dry and cool condition.

PACKING

25kg/ bag

Further information and advice are freely available from:

PYE PRODUCTS (M) SDN. BHD. (Co. No. 206933-D)

Lot 4993, 5½ Mile Jalan Meru, 41050 Klang, Selangor Darul Ehsan, Malaysia.

Tel : 603-3392 8104, 3392 8112 Fax : 603-3392 8097

E-mail : enquiry@pyeproducts.com Website : www.pyeproducts.com



MS ISO 9001 REG. No. 601099-12



BUATAN MALAYSIA

All information contained within this brochure is only intended to give a fair description of the products and their capabilities under specific test conditions. However, it does not constitute an offer of warranty by the manufacturer nor a guarantee of its accuracy or completeness in describing the performance or suitability of the various products.